




From concrete to grass, the LN50 can tackle all types of urban terrain with ease

- Parks
- Sidewalks
- Bike & pedestrian lanes
- Parking lots

- Curb side
- Alleys
- Pathways
- Alongside buildings

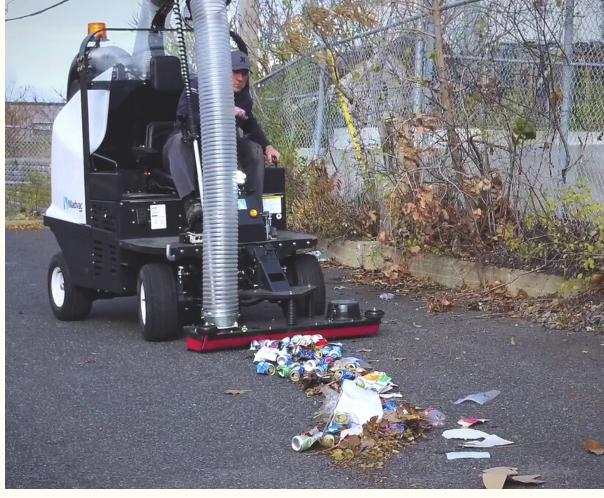







LN50 is the perfect all-terrain litter solution for

- Cities & municipalities
- Outdoor cleaning contractors
- Airports & seaports
- Transit authorities
- Healthcare services
- Distribution centers
- Shopping malls
- Educational & sports facilities
- Manufacturing facilities
- Amusement parks
- Casinos
- Military
- Correctional facilities



Key Attributes

- LN50 is the closest equivalent to the discontinued Tennant ATLV 4300;
- Productivity 6x faster than manual litter picking;
- Collects litter dry, humid or wet;
- Effortless litter removal using 48 in.
 (1219 mm) wide vacuum head;
- 15 ft. (4.57 m) retractable wander hose for hard-to-reach areas;







- A CDL permit is not required to operate this machine;
- Fully street legal lighting;
- 10 to 12 year lifespan;
- OEM spare parts shipped within 48 hours;
- Madvac has a 35+ years track record of success - when your machine is due for replacement we'll still be around.

Built to suit your needs

Configure the LN50 according to your specific requirements

- 48 in. (1219 mm)
 vacuum head
- Retractable wander hose
- Litter collector bags or bagless debris system (Kevlar bin)
- Water mist system (additional dust control)
- Overhead sunshield roof
- Heated seat
- Floor-mounted heater
- Tire flatproofing
- Fire extinguisher



To request a quote www.madvac.com
Diesel / Gas -> LN50 -> Request a quote







Madvac LN50 Data & Performance Information

Capacities Fuel tank 10.2 gal. (39 L) 12.5 gal. (47 L) Hydraulic system 75 gal. (284 L) Litter capacity Engine Data Model Kubota Diesel D1105-E4B (EPA Tier 4 Final) Displacement 68.53 cu.in. (1123 cc) Gross rated power 24.8 hp (18.5 kW) @3200 rpm Legislation compliance **EPA Tier 4 Final** Air cleaner 2-stage Donaldson with restriction indicator Litter Collection System

Type	Straight-through system compacts litter at 2:1 ratio	
Container construction	16 gauge powder-coated steel	
Vacuum hose	7 in. (178 mm)	
Wander hose	Diameter: 6 in. (152 mm);	
	length: 15 ft. (4.57 m)	

Frame and Body

- Heavy gauge steel body on a welded 1/4 in. (6.35 mm) structural steel frame
- Electrostatic powder-coated paint

Dimensions (* base mo	odel)	
Width	48 in. (1219 mm)	
Length	95 in. (2413 mm)	
Height	92 in. (2337 mm)	
Wheelbase	69 in. (1753 mm)	
Ground clearance	10 in. (254 mm)	





Proud manufacturer of the Madvac product line

Telephone:

• 1-855-651-0444 (toll free - US/Canada)

• 1-450-651-0444 (international)

Fax: 450-651-0447
Email: info@exprolink.com

Address: 2170 Rue de la Province

Longueuil QC Canada J4G 1R7

Website: www.madvac.com
Sourcewell (US) and Canoe
(Canada) contract vendor
number: 093021-EXP

Vacuum System Vacuum rating 1800 CFM Controls Adjustale tilt steering column Steering Motion control Heavy duty hydrostatic Traction Front wheel drive Drive Forward speed 11 mph (18 km/h) Tires (all 4 wheels) Regular 20.5 in. (521 mm); Turf 20 in. (508 mm) **Brakes** Front hydrostatic brake; rear mechanical disc parking brake Gradeability 11.3 degree (20%) with full & empty hopper 2579 lbs (1170kg) Curb weight Suspension Front Leaf spring

Leaf spring



Rear



