



# PRODUCT CATALOG



HYDRO-EXCAVATION

SEWER JETTING

INDUSTRIAL CLEANING



# DELIVERY MADE EASY

with Hydra-Flex & Our Distribution Network

Hydra-Flex is a premium brand that has built a reputation of industry-leading innovation and superior quality for over 20 years.

We collaborate with top-tier dealers worldwide to ensure widespread distribution of our products. Thanks to our parent company's nationwide distribution network, we can deliver products to our partners faster than ever so they can provide seamless delivery and service for customers everywhere.



**Find a Hydra-Flex Dealer near you.**

## REQUEST A DEMO

Experience the power of our products – book a demo with your local dealer today!



## 24/7 SUPPORT

Our dedicated team is here to support you.

- Sales Support
- Customer Service
- Product Training
- Technical Support
- Marketing Support




## A PATH TO SUCCESS

We continually develop new products, expand our offerings, explore new applications and industries, and enhance our services to meet your needs.





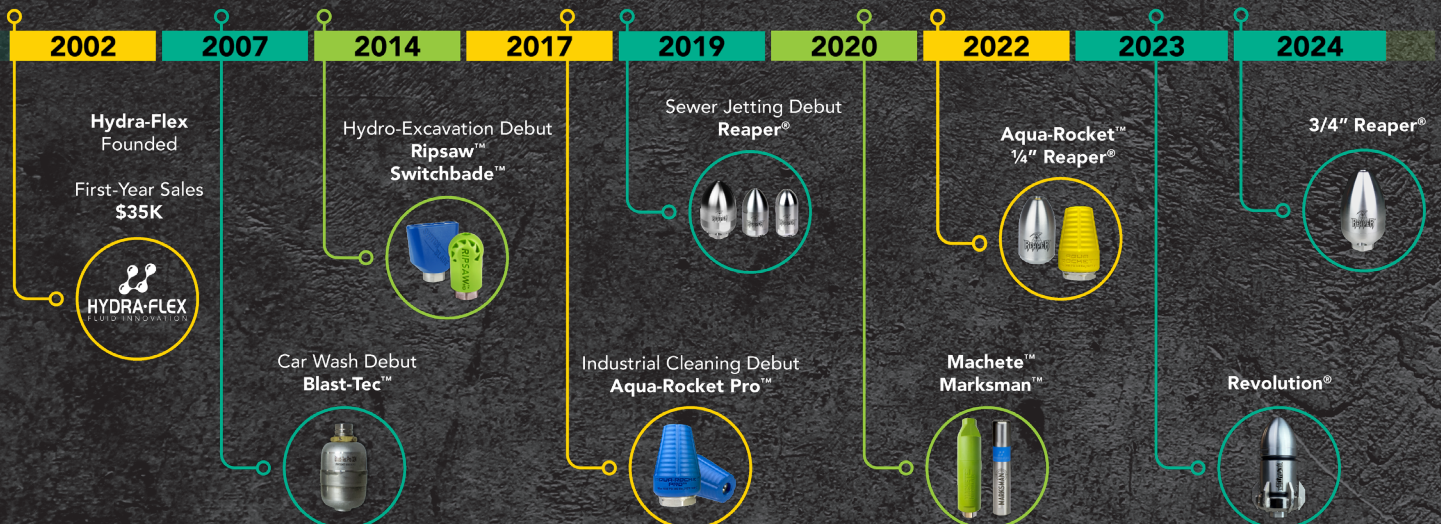

Check out this video to learn more about us.





# TABLE OF CONTENTS

<b>ABOUT US</b>	<b>1</b>
<b>WATER-SAVING TECHNOLOGY</b>	<b>3</b>
<b>PRODUCT OVERVIEW</b>	<b>5</b>
<b>HYDRO-EXCAVATION</b>	<b>8</b>
 Ripsaw HD™	9
 Switchblade™	13
 Machete™	17
<b>SEWER JETTING</b>	<b>22</b>
 Reaper®	23
<b>INDUSTRIAL CLEANING</b>	<b>28</b>
 Aqua-Rocket™	29
 Marksman™	33
<b>SAFETY</b>	<b>37</b>
<b>WARRANTY</b>	<b>38</b>






# WATER-SAVING TECHNOLOGY

## THE HYDRA-FLEX ADVANTAGE

Our patented water-saving technology sets us apart from competitors. **Flow-Straightening Technology** utilizes laminar flow to ensure every fluid particle flows along one smooth path to **maximize force while using less water.**

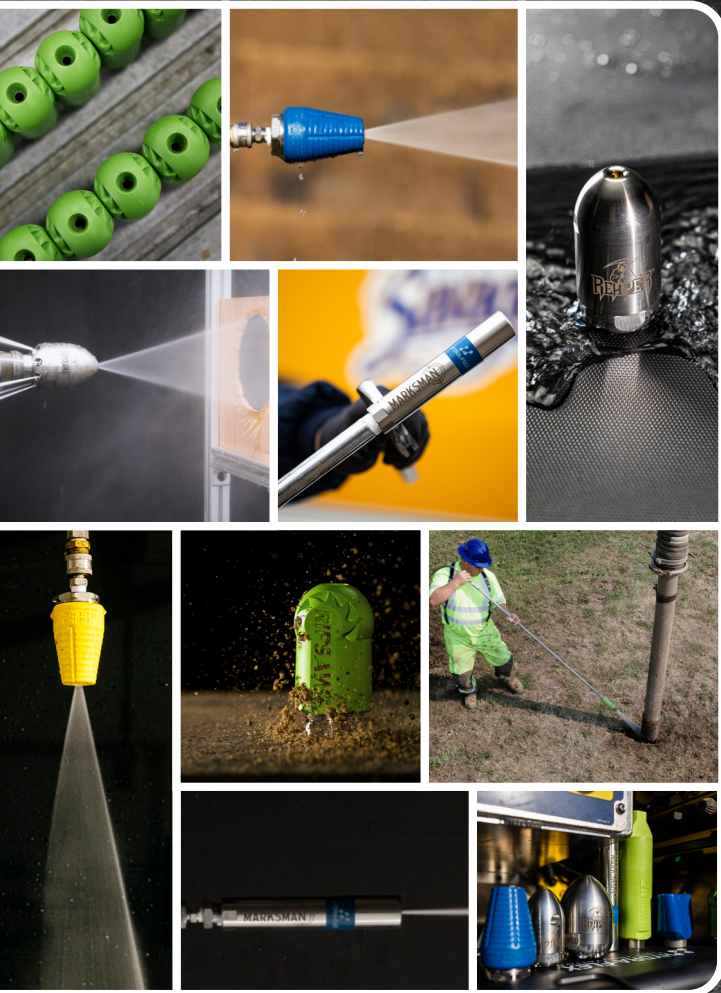

### WHAT WE DO

#### LAMINAR FLOW


Smooth and streamlined, all molecules move in the same direction at the same speed



### COMPETITORS

#### TURBULENT FLOW

Swirling and chaotic, all molecules flow in different directions at different speeds







# VISIT OUR VIDEO LIBRARY!

Product Videos | Let's Talk About Series | Testimonials  
Hydra-Flex vs. the Competition | Repair Kit Tutorials and more!



## LOCAL EXPERTS

Our team of passionate problem-solvers are equipped with the resources to innovate, engineer, test, and manufacture quality products locally, in Savage, Minn., USA.

**REPAIR, DON'T REPLACE!**

Our nozzles are designed to be repairable, extending product longevity and providing a better return on investment.

**MORE THAN 38 BILLION**

Gallons of water saved by Hydra-Flex products



# OUTPERFORM, OUTLAST AND EXCEED STANDARDS

Benefit from superior products that are exceptionally engineered, quality tested to the highest standards, and outperform competitors to:







PG. 7-20

## HYDRO-EXCAVATION

Cut through and break up soil with our high-pressure digging nozzles for precise, non-mechanical, and non-destructive excavation. They offer superior durability, outlast competitors, and have greater impact force than higher GPM nozzles.

Ripsaw HD™ | Switchblade™ | Machete™



PG. 21-26

## SEWER JETTING

Reaper nozzles use high-pressure water jets to remove build-ups and eliminate blockages within pipe walls. These effective and versatile tools offer a complete solution for clearing obstructions and maintaining sewer lines.

Reaper® - 1" | 3/4" | 1/2" | 3/8" | 1/4"



PG. 27-36

## INDUSTRIAL CLEANING

Effectively and quickly clean any surface with our high-pressure cleaning nozzles. Based on application, water pressure, flow rate, and distance to surface, we can match you with the perfect cleaning solution.

Marksman™ | Aqua-Rocket™



# HYDRO-EXCAVATION





**RIPSAW™  
HD**

**SWITCH  
BLADE™**

**MACHETE™**



Watch our  
Hydro-Ex  
video playlist!




# RIPSAW™ HD

## HEAVY-DUTY, RELIABLE POWER

Industry-leading Spinner Tip

Pothole | Daylight | Debris Removal  
Pile Hole | Frac Tank Cleaning

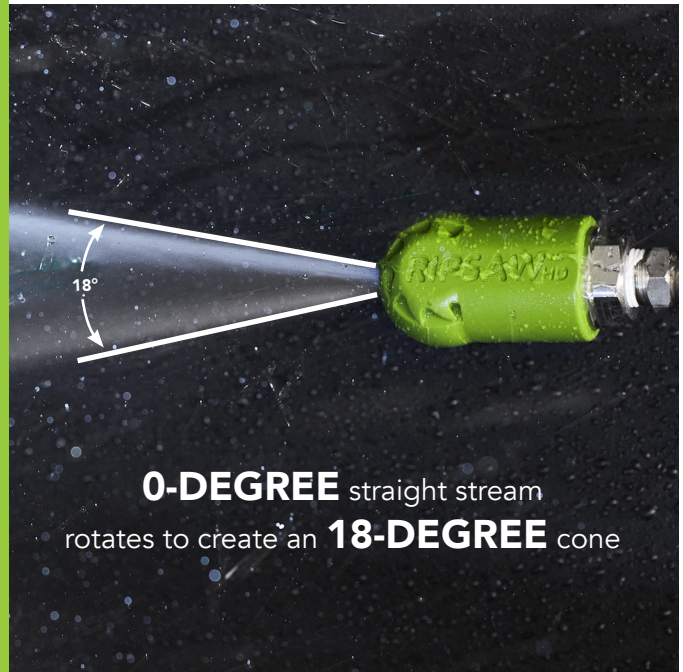

**0-DEGREE** straight stream  
rotates to create an **18-DEGREE** cone

### SPRAY PATTERN



“

“It’s amazing! What the Ripsaw means to us is a nearly 30 percent increase in productivity. It’s a simple thing on a half-million-dollar truck, and it makes a big difference.”

**Bruce Bergstrom, CEO**

*Energy Construction Solutions, Inc.*

### QUICK FACTS

- Flow Rates:  
1.5 – 10.7 GPM
- Inlet Pressure:  
1,000 – 3,200 PSI
- Nozzle Sizes:  
#3.0 – #12.0

Tungsten Carbide  
wear surfaces  
provide longer  
lifespan

Long-lasting  
heavy-duty  
coating

Stainless steel housing  
protects against wear  
and tear





**DIG 35% FASTER**



**WHY CHOOSE RIPSAW?**

- Stands tall against frost, shale, rocky soil, and more!
- Premium stainless steel housing and tungsten carbide wear surfaces increase durability and longevity
- Heavy-duty, non-conductive Hytrel coating protects nozzle components, users, and utilities
- Constant rotating stream allows for safe digging around utilities when used as directed (Reference Best Practices & Safety Instruction on our website)
- Repair kits available for extended life

**SAFE AROUND UTILITIES WHEN USED AS DIRECTED**



**MORE OPERATIONAL HOURS**



The Ripsaw HD's stream rotates at a slower RPM compared to other nozzles, which increases its digging power, improves control, and reduces wear and tear to lengthen its life.

**USE LESS WATER**



The 18-degree rotating stream helps you dig deeper and faster to reduce water use.

- Less trips to the dump and truck refills
- Helps to maintain compliance with weight restrictions on truck






## KEY FEATURES

★ **Hytrex Coating**  
Protects users and sensitive underground utilities  
**Bonus:** Lasts 2-3 times longer than previous coating

★ **Rubber Boot**  
Provides a smooth rotation

★ **Tungsten Carbide Nozzle Tip and Seat**  
Materials proven to outlast ceramic nozzles

★ **Inlet Screen**  
Protects nozzle from contaminants



Easily rebuild the Ripsaw with our field repair kits! Select the right kit for your nozzle size and get back to work in just 10 minutes.






**REPAIR KIT**



**DOME INLET SCREENS**

10 Pack



Part Number: 20019939

NOZZLE SIZE	RIPSAW HD NOZZLE PART NUMBER	REPAIR KIT PART NUMBER	FLOW RATE CHART (GPM)					
			@1,000 PSI (70 Bar)	@1,500 PSI (103 Bar)	@2,000 PSI (138 Bar)	@2,500 PSI (172 Bar)	@3,000 PSI (207 Bar)	@3,200 PSI (221 Bar)
3.0	20022380	20022328	1.5 GPM (5.7 LPM)	1.8 GPM (6.8 LPM)	2.1 GPM (7.9 LPM)	2.4 GPM (9.1 LPM)	2.6 GPM (9.8 LPM)	2.7 GPM (10.2 LPM)
4.0	20022381	20022329	2.0 GPM (7.6 LPM)	2.4 GPM (9.1 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.5 GPM (13.2 LPM)	3.6 GPM (13.6 LPM)
5.0	20022382	20022330	2.5 GPM (9.5 LPM)	3.1 GPM (11.7 LPM)	3.5 GPM (13.2 LPM)	4.0 GPM (15.1 LPM)	4.3 GPM (16.3 LPM)	4.5 GPM (17.0 LPM)
6.0	20022383	20022331	3.0 GPM (11.4 LPM)	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.4 GPM (20.4 LPM)
8.0	20022384	20022332	4.0 GPM (15.1 LPM)	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.2 GPM (27.3 LPM)
10.0	20022385	20022333	5.0 GPM (18.9 LPM)	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	8.9 GPM (33.7 LPM)
12.0	20022386	20022334	6.0 GPM (22.7 LPM)	7.3 GPM (27.6 LPM)	8.5 GPM (32.2 LPM)	9.5 GPM (36.0 LPM)	10.4 GPM (39.4 LPM)	10.7 GPM (40.5 LPM)



**OUTFIT YOUR RIG**

Hydro-Excavation or Municipal-focused demo boxes are available to fully outfit your rig. Email us for more info.

[hello@hydraflexinc.com](mailto:hello@hydraflexinc.com)



**FIND A HYDRA-FLEX DEALER IN YOUR AREA**




# SWITCH BLADE™

## CUSTOMIZABLE STREAMS

Faster & Deeper Impingement


Trenching | Precision Digging  
Starting Tool | Compact Soils

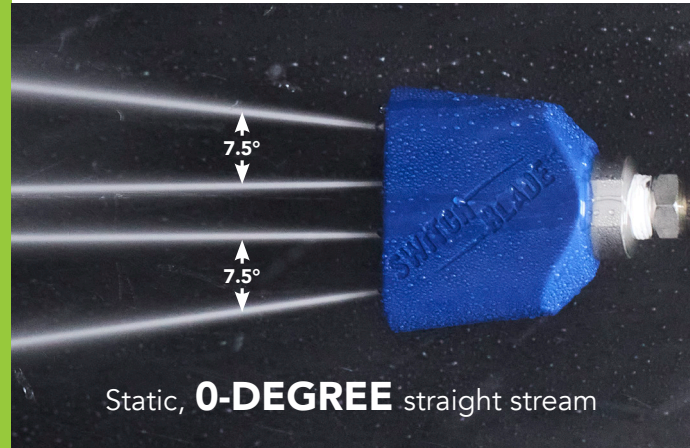

### QUICK FACTS

- Flow Rates (Pre-Configured):  
2.0 – 14.0 GPM  
\*Reference pill chart on Page 16 for more available options
- Inlet Pressure:  
1,000 - 4,000 PSI

### SPRAY PATTERN

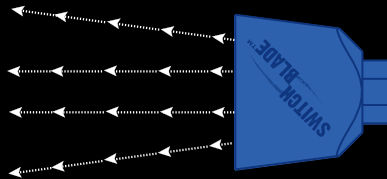

“

“This nozzle is pretty impressive. You have the option of turning it sideways, so you can just keep a nice cutting action. We do a lot of trenching where it doesn't have to be very wide. This nozzle is perfect for those narrow channels.”

**Jesse Doffler**  
Goliath Hydro-Vac





**IMPRESSIVE LONGEVITY**



**GREATER IMPACT FORCE**



**MULTIPLE STREAM OPTIONS**



**VERSATILITY IN THE FIELD**




**WHY CHOOSE SWITCHBLADE?**

- Premium stainless steel housing and tungsten carbide wear surfaces increase durability and longevity
- Heavy-duty, non-conductive Hytrel coating protects nozzle components and users
- Greater force allows you to get the same impact as nozzles with higher GPM
- Multiple stream options, with tons of flow rate configurations

From the Ace's precise single stream and the Quad's efficient four streams to the perfect balance of both with the Deuce, the Switchblade's range of streams allow you to customize your nozzle to suit the specific needs of the job.

Individual, replaceable, color-coded nozzle pills – as well as plugs – allow you to change the water flow rate based on based on job and soil conditions. See Page 15 for more info.





# SWITCHBLADE™



## CHOOSE YOUR PRE-CONFIGURED NOZZLE

Switchblade nozzles are pre-configured in the most commonly used flow rates across the industry.

NOZZLE SIZE	PART NUMBER	FLOW RATE CHART						
		@1,000 PSI (69 Bar)	@1,500 PSI (103 Bar)	@2,000 PSI (138 Bar)	@2,500 PSI (172 Bar)	@3,000 PSI (207 Bar)	@3,500 PSI (241 Bar)	@4,000 PSI (275 Bar)
<b>SWITCHBLADE ACE NOZZLE KIT</b>								
8.0	20022354	4.0 GPM (15.1 LPM)	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.2 GPM (27.3 LPM)	8.0 GPM (30.2 LPM)
10.0	20022355	5.0 GPM (18.9 LPM)	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	8.9 GPM (33.7 LPM)	9.0 GPM (34.0 LPM)
12.0	20022356	6.0 GPM (22.7 LPM)	7.3 GPM (22.4 LPM)	8.5 GPM (32.1 LPM)	9.5 GPM (35.9 LPM)	10.4 GPM (39.3 LPM)	10.7 GPM (40.5 LPM)	12.0 GPM (45.4 LPM)
<b>SWITCHBLADE DEUCE NOZZLE KIT</b>								
4.0	20022343	2.0 GPM (7.6 LPM)	2.4 GPM (9.1 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.5 GPM (13.2 LPM)	3.6 GPM (13.6 LPM)	4.0 GPM (15.1 LPM)
6.0	20022344	3.0 GPM (11.4 LPM)	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.9 LPM)	5.2 GPM (19.8 LPM)	5.4 GPM (20.4 LPM)	6.0 GPM (22.7 LPM)
8.0	20022345	4.0 GPM (15.1 LPM)	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.2 GPM (27.3 LPM)	8.0 GPM (30.2 LPM)
10.0	20022346	5.0 GPM (18.9 LPM)	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	8.9 GPM (33.7 LPM)	9.0 GPM (34.0 LPM)
12.0	20022347	6.0 GPM (22.7 LPM)	7.3 GPM (22.4 LPM)	8.5 GPM (32.1 LPM)	9.5 GPM (35.9 LPM)	10.4 GPM (39.3 LPM)	10.7 GPM (40.5 LPM)	12.0 GPM (45.4 LPM)
<b>SWITCHBLADE QUAD NOZZLE KIT</b>								
4.0	20022291	2.0 GPM (7.6 LPM)	2.4 GPM (9.1 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.5 GPM (13.2 LPM)	3.6 GPM (13.6 LPM)	4.0 GPM (15.1 LPM)
6.0	20022294	3.0 GPM (11.4 LPM)	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.9 LPM)	5.2 GPM (19.8 LPM)	5.4 GPM (20.4 LPM)	6.0 GPM (22.7 LPM)
8.0	20022277	4.0 GPM (15.1 LPM)	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.2 GPM (27.3 LPM)	8.0 GPM (30.2 LPM)
10.0	20022278	5.0 GPM (18.9 LPM)	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	8.9 GPM (33.7 LPM)	9.0 GPM (34.0 LPM)
12.0	20022295	6.0 GPM (22.7 LPM)	7.3 GPM (22.4 LPM)	8.5 GPM (32.1 LPM)	9.5 GPM (35.9 LPM)	10.4 GPM (39.3 LPM)	10.7 GPM (40.5 LPM)	12.0 GPM (45.4 LPM)
14.0	20022279	7.0 GPM (26.4 LPM)	8.6 GPM (32.5 LPM)	9.9 GPM (37.4 LPM)	11.1 GPM (42.0 LPM)	12.1 GPM (45.8 LPM)	13.1 GPM (49.5 LPM)	14.0 GPM (52.9 LPM)



**INTERCHANGE PILLS AND FLOW RATES**



Switchblade pills can be easily replaced in the field by using a nut screwdriver.

**WANT EVEN MORE VERSATILITY?**



Use flow plugs to block streams, enhancing the versatility of your Quad.

PART NUMBER	DESCRIPTION	COLOR	IMAGE	FLOW RATE (EACH PILL)						
				@1,000 PSI (69 Bar)	@1,500 PSI (103 Bar)	@2,000 PSI (138 Bar)	@2,500 PSI (172 Bar)	@3,000 PSI (207 Bar)	@3,500 PSI (241 Bar)	@4,000 PSI (275 Bar)
20022319	1.0 Pill	Blue		0.5 GPM (1.8 LPM)	0.6 GPM (2.2 LPM)	0.7 GPM (2.6 LPM)	0.8 GPM (3.0 LPM)	0.9 GPM (3.4 LPM)	0.9 GPM (3.4 LPM)	1.0 GPM (3.7 LPM)
20022320	2.0 Pill	Yellow		1.0 GPM (3.7 LPM)	1.2 GPM (4.5 LPM)	1.4 GPM (5.2 LPM)	1.6 GPM (6.0 LPM)	1.7 GPM (6.4 LPM)	1.9 GPM (7.1 LPM)	2.0 GPM (7.5 LPM)
20022321	3.0 Pill	Green		1.5 GPM (5.7 LPM)	1.8 GPM (6.8 LPM)	2.1 GPM (7.9 LPM)	2.4 GPM (9.1 LPM)	2.6 GPM (9.8 LPM)	2.7 GPM (10.2 LPM)	3.0 GPM (11.3 LPM)
20022322	4.0 Pill	Orange		2.0 GPM (7.6 LPM)	2.4 GPM (9.1 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.5 GPM (13.2 LPM)	3.6 GPM (13.6 LPM)	4.0 GPM (15.1 LPM)
20022323	5.0 Pill	Purple		2.5 GPM (9.5 LPM)	3.1 GPM (11.7 LPM)	3.5 GPM (13.2 LPM)	4.0 GPM (15.1 LPM)	4.3 GPM (16.2 LPM)	4.5 GPM (17.0 LPM)	5.0 GPM (18.9 LPM)
20022324	6.0 Pill	Red		3.0 GPM (11.4 LPM)	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.9 LPM)	5.2 GPM (19.8 LPM)	5.4 GPM (20.4 LPM)	6.0 GPM (22.7 LPM)
20022325	8.0 Pill	Black		4.0 GPM (15.1 LPM)	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.2 GPM (27.3 LPM)	8.0 GPM (30.2 LPM)
20022326	10.0 Pill	White		5.0 GPM (18.9 LPM)	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	8.9 GPM (33.7 LPM)	9.0 GPM (34.0 LPM)
20022327	12.0 Pill	Pink		6.0 GPM (22.7 LPM)	7.3 GPM (22.4 LPM)	8.5 GPM (32.1 LPM)	9.5 GPM (35.9 LPM)	10.4 GPM (39.3 LPM)	10.7 GPM (40.5 LPM)	12.0 GPM (45.4 LPM)
10014279	SST Plug	-		-	-	-	-	-	-	-

\*All pills have a 1/8" NPT connection thread.



**SWITCHBLADE™  
PRODUCT SPOTLIGHT**

**SEE SWITCHBLADE IN ACTION**



# MACHETE™


## MAXIMIZE SPEED & PERFORMANCE

Prioritize Safety with Incredible Ergonomics

Bell Holing | Sloping | Trenching  
Finishing Tool | Caliche / Hard Soils



**0-DEGREE** straight stream  
oscillates to create a **15-DEGREE** wedge

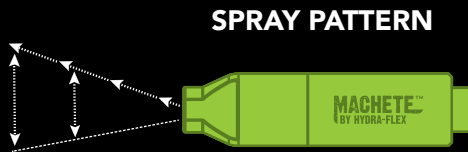

“

“This tip rocks. It’s definitely my go-to whether I’m into harsh ground or making my work look great with finishing touches. I’ve been using it for over a year now; it’ll last a long time. This is definitely the tip to use and recommend it on every truck!”

**Dave Temple, Owner / Operator**  
CDT Hydrovac Excavation

### QUICK FACTS

- Flow Rates: 3.0 – 8.9 GPM
- Inlet Pressure: 1,000 – 3,200 PSI
- Nozzle Sizes: #6.0 – #10.0





**DIG 48% FASTER**



**ERGONOMICALLY SOUND**



**SAFE AROUND UTILITIES  
WHEN USED AS DIRECTED**



**UNIQUE MOTION OFFERS  
SUPERIOR PERFORMANCE**



**WHY CHOOSE MACHETE?**

- Built specifically for challenging soil conditions where standard nozzles fall short
- Designed to minimize undermining risks
- Premium stainless steel housing and tungsten carbide wear surfaces increase durability and longevity
- Greater power allows you to use smaller nozzle sizes while getting the same impact as nozzles with higher GPM
- Replacement covers and repair kits available for extended life

- Approved for use around sensitive underground utilities  
(Reference Best Practices & Safety Instruction on our website)
- Oscillating motion helps reduce undermining
- Requires less operator bending and movement


Combine the safety and rotation of the Ripsaw with the straight-line power of the Switchblade to offer a long, slicing stream that optimizes efficiency and reaches greater depths faster.



# MACHETE™



## KEY FEATURES

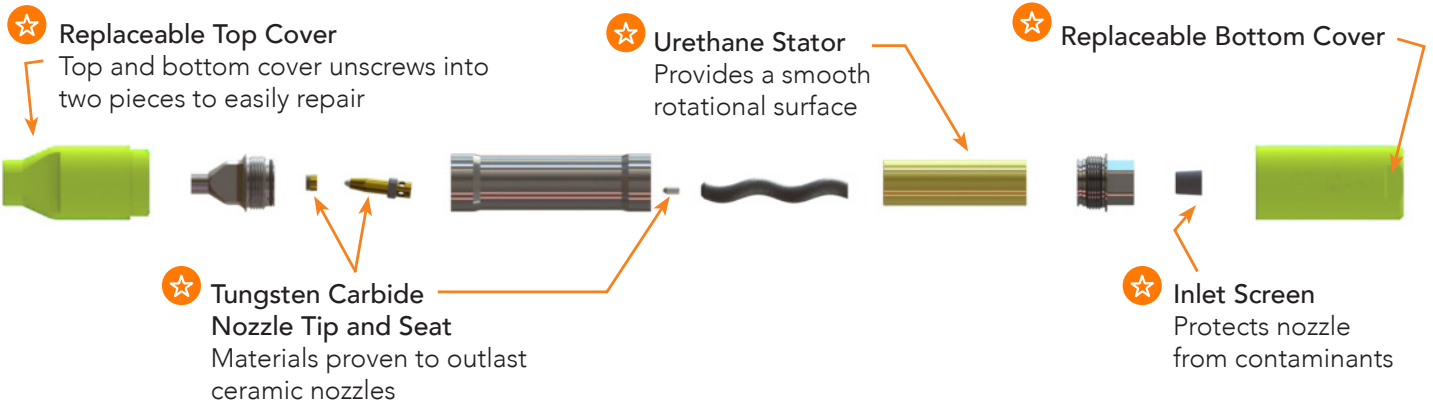


Repair kits are available to extend the nozzle's lifespan. Scan to watch our repair video.






**REBUILD KIT**

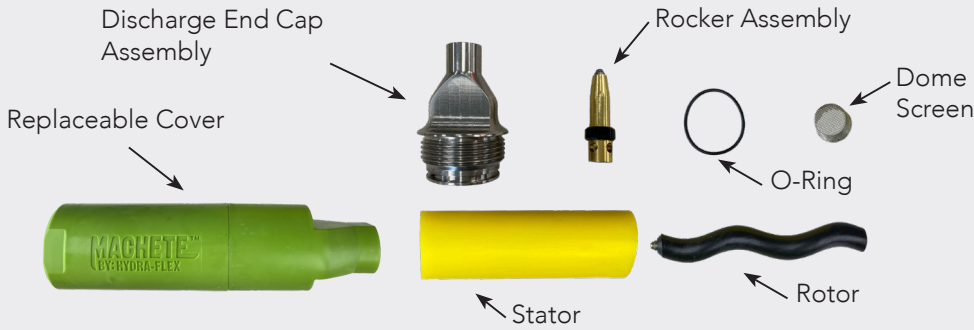

**DOME INLET SCREENS**

10 Pack



Part Number: 20019939

NOZZLE SIZE	NOZZLE PART NUMBER	REBUILD KIT PART NUMBERS	FLOW RATE CHART (GPM)					
			@1,000 PSI (70 Bar)	@1,500 PSI (103 Bar)	@2,000 PSI (138 Bar)	@2,500 PSI (172 Bar)	@3,000 PSI (207 Bar)	@3,200 PSI (221 Bar)
6.0	20022427	20022454	3.0 GPM (11.4 LPM)	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.4 GPM (20.4 LPM)
8.0	20022428	20022455	4.0 GPM (15.1 LPM)	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.2 GPM (27.3 LPM)
10.0	20022429	20022456	5.0 GPM (18.9 LPM)	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	8.9 GPM (33.7 LPM)

**LET'S TALK MACHETE™**

WATCH VIDEO TO LEARN MORE ABOUT MACHETE



**FIND A DEALER TO REQUEST A DEMO!**



# SEWER JETTING







Watch our  
Sewer Jetting  
video playlist!





SOME SIZES AVAILABLE IN NPT AND BSPP




## BLOCKAGE REMOVER

Fastest Cutter on the Market

Cut Roots | Blockage Eliminator | FOG Removal  
Paraffin Wax Removal | Break Down Wipes | Clear Calcite

### SPRAY PATTERN



“

Optimized stream quality results in greater impingement, allowing the use of one tool for various applications like cutting, cleaning, and removal.”

Joshua Rangel, President  
All County Plumbing, Inc.

1/4" REAPER



1 Pass

6-8 Gallons/Minute

COMPETITOR



4 Passes

18-20 Gallons/Minute

WATER SAVINGS



1/4"

RESIDENTIAL

2-4" pipes



3/8"

LATERAL

3-6" pipes



1/2"

LATERAL

4-8" pipes

CUTS 6X FASTER

NEW!



3/4"

MAINLINE

4-10" pipes

CUTS 6X FASTER

IMPROVED CUTTING POWER



1"


MAINLINE

6-18" pipes



WATCH OUR REAPER VIDEOS

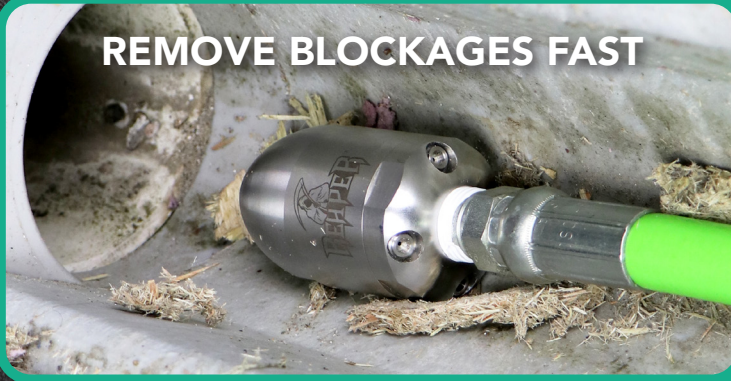

**REMOVE BLOCKAGES FAST****USES LESS WATER****DURABILITY TO OUTLAST COMPETITION****CUT AND CLEAR FASTER  
REACH FULL DIAMETER OF PIPE****WHY CHOOSE REAPER?**

- Premium stainless steel housing and tungsten carbide wear surfaces increase durability and longevity
- Spray angles optimized for maximum pulling, thrusting, and cleaning power
- Greater force allows you to cut blockages faster and complete more jobs in a day
- Fully field repairable to resume operation in just 10 minutes

Clear and clean with the powerful rotating front stream that destroys blockages and cleans pipe walls while the back jets propel the nozzle forward and flush.

**The 80 GPM 1" Reaper rear jets are proven to pull lines up to 1,200 feet!**

Expertly designed to hit specific angles that shorten the time it takes to cut through roots and tough blockages and reach the full diameter of the pipe.



## ROTATING NOZZLE



### PRO TIP

Clear a blockage in two easy steps:

1. Feed the nozzle up to the blockage.
2. Pull back the hose (6-12" depending on pipe size), then push the nozzle forward into the blockage. This maximizes power and efficiency by ensuring the rotating stream reaches the pipe's full diameter to cut the blockage at its outermost point.



## KEY FEATURES




### Rubber Boot

Provides a smooth rotational surface



### Inlet Screen

Protects nozzle from contaminants

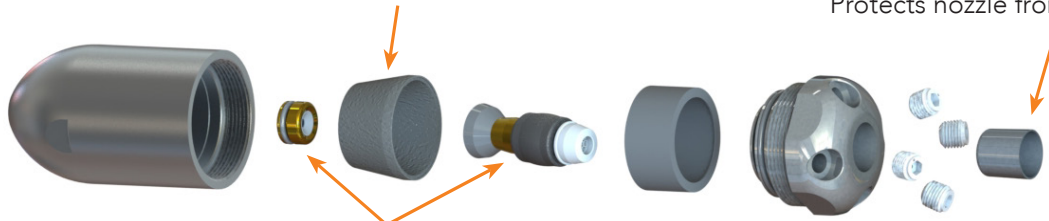

### Tungsten Carbide Nozzle Tip and Seat

Materials proven to outlast ceramic nozzles

## QUICK FACTS







Repair kits get you back up and running in about 10 minutes without leaving the job site.

**NO VISCOUS FLUID NEEDED!**

### REAR JET REPAIR KIT

3/8" & 1/2"

3/4" & 1"



\*Not Available for the 1/4" Reaper

### DOME INLET SCREENS

**Part Numbers:**

1/4" : 20022304

3/8" : 20022296

1/2" : 20022297


3/4" : 20024703

1" : 20022301

10 Pack



### ROTOR REPAIR KIT

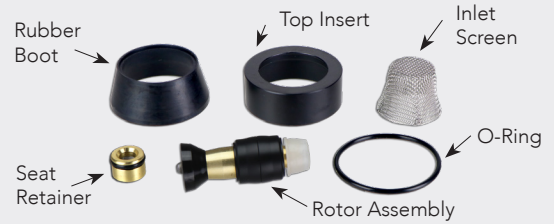

1/4" Repair Kit does not include top insert, boot is plastic, and rotor assembly looks slightly different.

NOZZLE SIZE	FNPT NOZZLE PART NUMBER	BSPP NOZZLE PART NUMBER	ROTOR REPAIR KIT PART NUMBER	REAR JET REPAIR KIT	FLOW RATE CHART						
					@1,500 PSI (103 Bar)	@2,000 PSI (138 Bar)	@2,500 PSI (172 Bar)	@3,000 PSI (207 Bar)	@3,500 PSI (241 Bar)	@4,000 PSI (276 Bar)	@5,000 PSI (344 Bar)
<b>1/4" NOZZLE - IDEAL FOR 2" - 4" OR 50MM - 100MM PIPES</b>											
6.0	20022461	20022463	20022303	--	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.6 GPM (21.2 LPM)	6.0 GPM (22.7 LPM)	6.7 GPM (25.4 LPM)
8.0	20022462	20022464	20022303	--	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.5 GPM (28.4 LPM)	8.0 GPM (30.2 LPM)	9.0 GPM (34.1 LPM)
<b>3/8" NOZZLE - IDEAL FOR 3" - 6" OR 90mm - 180mm PIPES</b>											
6.0	20022416	20022440	20022403	20022409	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.6 GPM (21.2 LPM)	6.0 GPM (22.7 LPM)	--
9.0	20022417	20022441	20022404	20022410	5.5 GPM (20.8 LPM)	6.4 GPM (24.2 LPM)	7.1 GPM (26.9 LPM)	7.8 GPM (29.5 LPM)	8.4 GPM (31.8 LPM)	9.0 GPM (34.1 LPM)	--
12.0	20022418	20022442	20022405	20022411	7.3 GPM (27.6 LPM)	8.5 GPM (32.2 LPM)	9.5 GPM (36.0 LPM)	10.4 GPM (39.4 LPM)	11.2 GPM (42.4 LPM)	12.0 GPM (45.4 LPM)	--
<b>1/2" NOZZLE - IDEAL FOR 4" - 8" OR 110mm - 225mm PIPES</b>											
12.0	20022419	--	20022406	20022411	7.3 GPM (27.6 LPM)	8.5 GPM (32.2 LPM)	9.5 GPM (36.0 LPM)	10.4 GPM (39.4 LPM)	11.2 GPM (42.4 LPM)	12.0 GPM (45.4 LPM)	--
15.0	20022420	--	20022407	20022412	9.2 GPM (34.8 LPM)	10.6 GPM (40.1 LPM)	11.9 GPM (45.0 LPM)	13.0 GPM (49.2 LPM)	14.0 GPM (53.0 LPM)	15.0 GPM (56.8 LPM)	--
18.0	20022421	--	20022408	20022413	11.0 GPM (41.6 LPM)	12.7 GPM (48.1 LPM)	14.2 GPM (53.8 LPM)	15.6 GPM (59.1 LPM)	16.8 GPM (63.6 LPM)	18.0 GPM (68.1 LPM)	--
24.0	20022423	--	20022408	20022415	14.7 GPM (55.6 LPM)	17.0 GPM (64.4 LPM)	19.0 GPM (71.9 LPM)	20.8 GPM (78.7 LPM)	22.4 GPM (84.8 LPM)	24.0 GPM (90.8 LPM)	--
<b>3/4" NOZZLE - IDEAL FOR 4" - 10" OR 101mm - 254mm PIPES</b>											
30.0	10019338	--	20024158	10019335	18.7 GPM (70.8 LPM)	21.7 GPM (82.5 LPM)	24.1 GPM (91.6 LPM)	26.5 GPM (100.7 LPM)	--	--	--
40.0	10019339	--	20024158	10019336	26.0 GPM (98.8 LPM)	30.2 GPM (114.8 LPM)	33.6 GPM (127.7 LPM)	37.0 GPM (140.6 LPM)	--	--	--
50.0	10019340	--	20024158	10019337	32.4 GPM (123.9 LPM)	37.6 GPM (142.9 LPM)	41.9 GPM (159.2 LPM)	46.1 GPM (175.2 LPM)	--	--	--
<b>1" NOZZLE - IDEAL FOR 6" - 18" OR 180mm - 460mm PIPES</b>											
40.0	20024151	--	20024158*	20024159	26.9 GPM (102.0 LPM)	31.1 GPM (117.8 LPM)	34.8 GPM (131.7 LPM)	38.1 GPM (144.2 LPM)	--	--	--
60.0	20024152	--	20024158*	20024160	39.2 GPM (148.4 LPM)	45.3 GPM (171.3 LPM)	50.6 GPM (191.5 LPM)	55.4 GPM (209.8 LPM)	--	--	--
80.0	20024153	--	20024158*	20024161	49.0 GPM (185.4 LPM)	56.6 GPM (214.1 LPM)	63.2 GPM (239.4 LPM)	69.3 GPM (262.3 LPM)	--	--	--

\*If you purchased your 1" Reaper prior to March 2024, use Rotor Repair Kit (40.0, 60.0, and 80.0) part number: 20022408



# INDUSTRIAL CLEANING





**AQUA  
ROCKET™**

**MARKSMAN™**



Watch our  
Industrial Cleaning  
video playlist!




# AQUA ROCKET™

## DO-IT-ALL CLEANING TOOL


Tackle Any Challenge with Efficiency

Production Facilities | Food Processing Facilities  
Heavy Equipment | Car Wash Clean-Ups  
Environmental Clean-Ups | Concrete | Livestock Barns  
Graffiti Removal | Surface Prep | And so much more!

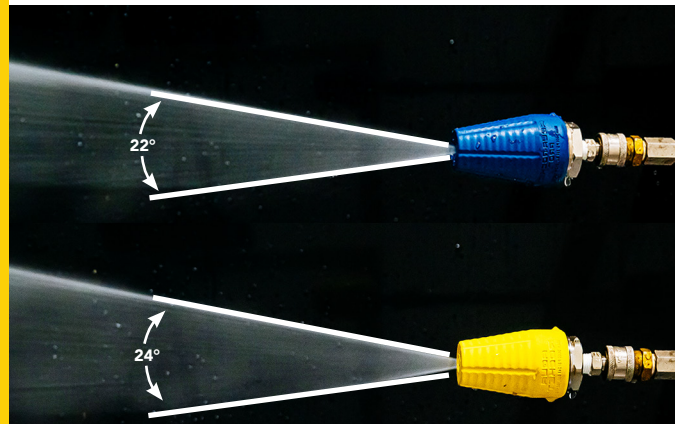

**0-DEGREE** straight stream rotates to create a **22- or 24-DEGREE** cone

### SPRAY PATTERN



“

After switching from our previous nozzles to Aqua-Rocket, our cleaning processes overall completion time dropped by more than 50 percent. This is huge in our industry because it enables us to repurpose more than eight hours for other tasks.”

**Chadwick Kogelschatz,**  
Continuous Improvement Manager  
*Roskam Baking Company*

### QUICK FACTS

- Flow Rates: 0.9 – 11.2 GPM
- Inlet Pressure: 750 – 5,600 PSI
- Nozzle Sizes: #2.0 – #10.0

High-temperature, drop-resistant rubber cover protects nozzle



Tungsten Carbide wear surfaces provide longer lifespan

**AQUA ROCKET™**

**AQUA ROCKET™**





## CLEAN SURFACES 42% FASTER



## TACKLE MORE JOBS IN A DAY



## TAKE ON THE TOUGHEST TASKS



## LAST 5X TIMES LONGER



### WHY CHOOSE AQUA-ROCKET?

- Clean surfaces faster and complete more jobs in a day
- Longer lifespan than ceramic nozzles
- Premium stainless steel housing and tungsten carbide wear surfaces increase durability and longevity
- Cleaning power allows you to use smaller nozzle sizes while getting the same impact as nozzles with higher GPM
- Drop-resistant cover protects nozzle and lengthens life
- Heat-resistant to offer more versatility on jobs
- Repair kits available for extended life

This powerful cleaning nozzle comes in two options to meet your needs.

**Aqua-Rocket** is designed for smaller equipment and is available at a lower price point.

**Aqua-Rocket Pro** is designed for higher pressure equipment and tackles more demanding tasks.

Built with premium materials that last 5X longer than other nozzles to give you a better return on your investment.



# AQUA ROCKET™

## PRO TIP

Use the Aqua-Rocket in any direction! Thanks to its tungsten carbide nozzle tip, the Aqua-Rocket can start and stop both vertically and horizontally.




## KEY FEATURES

☆ Protective Rubber Cover  
Extra protection from impact



☆ Tungsten Carbide Nozzle Tip and Seat  
Materials proven to outlast brass nozzles



☆ Brass Boot  
Smooth rotational surface for consistent nozzle RPM



☆ Inlet Screen  
Protects nozzle from contaminants

## HOW TO CHOOSE?



**24°**

**AQUA ROCKET™**

**Flow Rate:**  
0.9 – 5.2 GPM

**PSI Rate:**  
750 – 3,600 PSI

**Maximum Temperature:**  
150-Degrees

**Light – Medium Pressure Washing**



**22°**

**AQUA ROCKET™ PRO**

**Flow Rate:**  
1.8 – 11.2 GPM

**PSI Rate:**  
1,500 – 5,600 PSI

**Maximum Temperature:**  
212-Degrees

**Heavy – Extreme Pressure Washing**



**DOMe INLET SCREENS**

10 Pack



**Part Number: 20019939**

**REPAIR KIT**



**AQUA-ROCKET SELECTION CHART**

NOZZLE SIZE	NOZZLE PART NUMBER	REPAIR KIT PART NUMBER	FLOW RATE CHART (GPM)					
			@ 750 PSI	@ 1,000 PSI	@ 1,500 PSI	@ 2,000 PSI	@ 2,500 PSI	@ 3,000 PSI
2.0	20021340	20021357	0.9 GPM (3.4 LPM)	1.0 GPM (3.8 LPM)	1.2 GPM (4.5 LPM)	1.4 GPM (5.3 LPM)	1.6 GPM (6.1 LPM)	1.7 GPM (6.4 LPM)
3.0	20021341	20021358	1.3 GPM (4.9 LPM)	1.5 GPM (5.7 LPM)	1.8 GPM (6.8 LPM)	2.1 GPM (7.9 LPM)	2.4 GPM (9.1 LPM)	2.6 GPM (9.8 LPM)
3.5	20021342	20021359	1.5 GPM (5.7 LPM)	1.8 GPM (6.8 LPM)	2.1 GPM (7.9 LPM)	2.5 GPM (9.5 LPM)	2.8 GPM (10.6 LPM)	3.0 GPM (11.4 LPM)
4.0	20021343	20021360	1.7 GPM (6.4 LPM)	2.0 GPM (7.6 LPM)	2.5 GPM (9.5 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.5 GPM (13.2 LPM)
4.5	20021344	20021361	1.9 GPM (7.2 LMP)	2.3 GPM (8.7 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.6 GPM (13.6 LPM)	3.9 GPM (14.8 LPM)
5.0	20021345	20021362	2.1 GPM (7.9 LPM)	2.5 GPM (9.5 LPM)	3.1 GPM (11.7 LPM)	3.5 GPM (13.2 LPM)	4.4 GPM (16.7 LPM)	4.3 GPM (16.3 LPM)
5.5	20021346	20021363	2.3 GPM (8.7 LPM)	2.8 GPM (10.6 LPM)	3.4 GPM (12.9 LPM)	3.9 GPM (14.8 LPM)	4.4 GPM (16.7 LPM)	4.8 GPM (18.2 LPM)
6.0	20021347	20021365	2.6 GPM (9.8 LPM)	3.0 GPM (11.4 LPM)	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)

**AQUA-ROCKET PRO SELECTION CHART**

NOZZLE SIZE	NOZZLE PART NUMBER	REPAIR KIT PART NUMBER	FLOW RATE CHART (GPM)						
			@ 1,500 PSI	@ 2,000 PSI	@ 2,500 PSI	@ 3,000 PSI	@ 3,500 PSI	@ 4,000 PSI	@ 5,000 PSI
3.0	20021348	20021366	1.8 GPM (6.8 LPM)	2.1 GPM (7.9 LPM)	2.4 GPM (9.1 LPM)	2.6 GPM (9.8 LPM)	2.8 GPM (10.6 LPM)	3.0 GPM (11.4 LPM)	3.4 GPM (12.9 LPM)
3.5	20021349	20021367	2.1 GPM (7.9 LPM)	2.5 GPM (9.5 LPM)	2.8 GPM (10.6 LPM)	3.0 GPM (11.4 LPM)	3.3 GPM (12.5 LPM)	3.5 GPM (13.2 LPM)	3.9 GPM (14.8 LPM)
4.0	20021350	20021368	2.4 GPM (9.1 LPM)	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.5 GPM (13.2 LPM)	3.7 GPM (14.0 LPM)	4.0 GPM (15.1 LPM)	4.5 GPM (17.0 GPM)
4.5	20021351	20021369	2.8 GPM (10.6 LPM)	3.2 GPM (12.1 LPM)	3.6 GPM (13.6 LPM)	3.9 GPM (14.8 LPM)	4.2 GPM (15.9 LPM)	4.5 GPM (17.0 GPM)	5.0 GPM (18.9 LPM)
5.0	20021352	20021370	3.1 GPM (11.7 LPM)	3.5 GPM (13.2 LPM)	4.0 GPM (15.1 LPM)	4.3 GPM (16.3 LPM)	4.7 GPM (17.8 LPM)	5.0 GPM (18.9 LPM)	5.6 GPM (21.2 LPM)
5.5	20021353	20021371	3.4 GPM (12.9 LPM)	3.9 GPM (14.8 LPM)	4.3 GPM (16.3 LPM)	4.8 GPM (18.2 LPM)	5.1 GPM (19.3 LPM)	5.5 GPM (20.8 LPM)	6.2 GPM (23.5 LPM)
6.0	20021354	20021372	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.6 GPM (21.2 LPM)	6.0 GPM (22.7 LPM)	6.7 GPM (25.4 LPM)
8.0	20021355	20021373	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.5 GPM (28.4 LPM)	8.0 GPM (30.3 LPM)	8.9 GPM (33.7 LPM)
10.0	20021356	20021374	6.1 GPM (23.1 LPM)	7.1 GPM (26.9 LPM)	7.9 GPM (29.9 LPM)	8.7 GPM (32.9 LPM)	9.4 GPM (35.6 LPM)	10.0 GPM (37.9 LPM)	11.2 GPM (42.4 LPM)





## LONG-DISTANCE PRECISION

Offers Incredible Operator Safety

Lift Stations | Manholes | Long-Distance Cleaning  
Tanks | Sweeper, Garbage, & Vac Trucks



Static, **0-DEGREE**, solid stream

### SPRAY PATTERN



“

“Compared to our old set up, the Marksman handles great! It doesn't wear you down after using it for any length of time. The fact that we can spray from a distance and not have to get up close pays off – really a great product.”

**Geoff Hinkle, O&M Technician**

*Woodard and Curran*

### QUICK FACTS

- Flow Rates: 4.8 – 17.4 GPM
- Inlet Pressure: 500 – 2,500 PSI
- Nozzle Sizes: #12.0 – #20.0

Lightweight and durable stainless steel housing



Highly resistant to wear and tear







**OVER 20FT STREAM**



**USE 21% LESS WATER**



**TAKE ON SOLIDS & GREASE TO REMOVE BUILD-UPS**



**REDUCE SAFETY RISKS**

### WHY CHOOSE MARKSMAN?

- Precise, accurate stream cleans at long-distances and in hard-to-reach places
- Cleans accurately and effectively up to 20 feet away
- No need for multiple lances to get more distance or lower into confined spaces
- Low-flow design reduces water use and speeds up cleaning

Clean solid and grease build-ups from long distances with the accurate and controlled stream.

Ensures safety while cleaning lift stations and manholes by keeping users out of confined spaces and away from hazardous substances.



# MARKSMAN™


## PRO TIP

Recommend for use with a 6-foot minimum lance equipped with dead-man switch.

Only use threaded connections (rather than quick-connects) to ensure water stream remains stable and intact for long-distance cleaning.



## KEY FEATURES

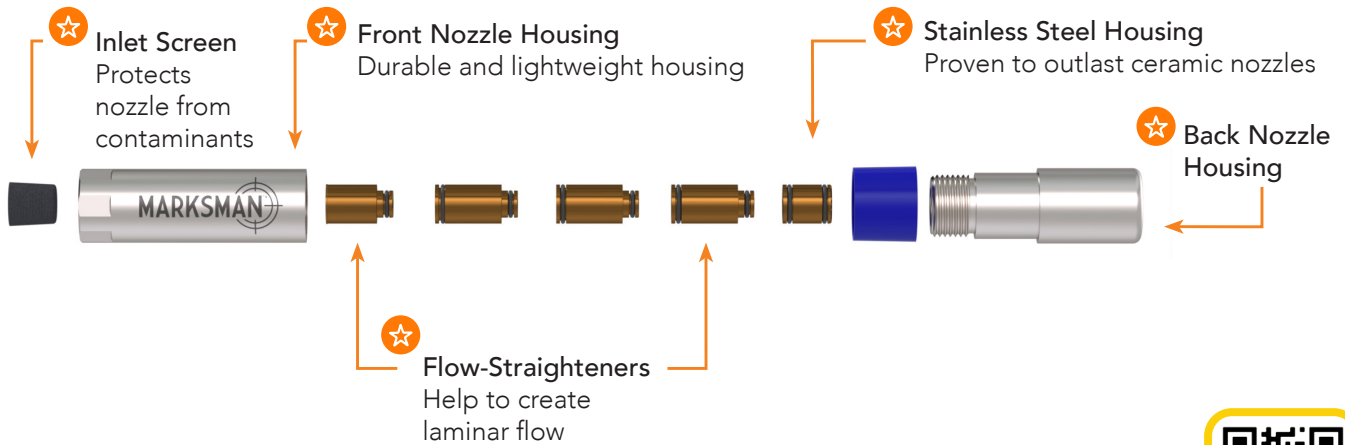

CHECK OUT OUR VIDEO LIBRARY!


MARKSMAN™  
PRODUCT SPOTLIGHT

CHECK OUT THIS VIDEO TO LEARN MORE ABOUT THE MARKSMAN



**DOMe INLET SCREENS**

10 pack



Part Number: 20022297



**OUTFIT YOUR RIG**

Hydro-Excavation or Municipal-focused demo boxes are available to fully outfit your rig. Email us for more info.

[hello@hydraflexinc.com](mailto:hello@hydraflexinc.com)

NOZZLE SIZE	NOZZLE PART NUMBER	FLOW RATE CHART				
		@ 500 PSI (34 bar)	@ 1,000 PSI (70 Bar)	@ 1,500 PSI (103 Bar)	@ 2,000 PSI (138 Bar)	@ 2,500 PSI (172 Bar)
12.0	20022431	4.8 GPM (18.2 LPM)	6.8 GPM (25.7 LPM)	8.3 GPM (31.4 LPM)	9.6 GPM (36.2 LPM)	10.8 GPM (40.9 LPM)
15.0	20022432	5.8 GPM (22.0 LPM)	8.2 GPM (31.0 LPM)	10.0 GPM (37.9 LPM)	11.6 GPM (43.9 LPM)	13.0 GPM (49.2 LPM)
20.0	20022433	7.8 GPM (29.5 LPM)	11.0 GPM (41.6 LPM)	13.5 GPM (51.1 LPM)	15.6 GPM (59.1 LPM)	17.4 GPM (65.9 LPM)

**CLEAN LIFT STATIONS MORE FREQUENTLY  
THANKS TO EASE OF USE**





# SAFETY GUIDELINES

The use of high-pressure equipment can present significant risks if proper precautions are not exercised prior to and during operation. Adhere to the following instructions and industry best practices to help prevent the risk of serious injury and/or death:

- **Risk Assessment:** Installers/operators are responsible for conducting job-specific risk assessment. Risk assessments need to consider material or substances hazards such as aerosols, biological and microbiological (viral or bacterial agents), combustible materials, dusts, explosion, fibers, flammable substances, fluids, fumes, gases, mists, and oxidizing agents.
- **Pressure Limits:** Do not exceed the maximum operating pressure (reference product pages for maximum operating pressure).
- **Access Control:** Untrained individuals must stay away from the work area.
- **Equipment Inspection:** Examine equipment for signs of deterioration, damage, or incorrect assembly. Do not operate damaged equipment until repaired or replaced.
- **Connections:** Ensure all threaded connections are secure and leak-free.
- **De-energize:** Always de-energize the system before servicing or replacing parts. Failure to do so could lead to severe injury and/or death.

## SITE SAFETY CHECK

- Conduct a job-specific risk assessment and follow site-specific safety procedures.
- Define work zones and post warning signs as needed.
- Remove unnecessary objects from the work area (i.e., loose parts, hoses, tools, etc.).
- Use appropriate Personal Protective Equipment (PPE).
- Ensure all air and water hoses are properly connected and secure.
- Inspect high-pressure threaded connections prior to use and ensure they are secure (do not use damaged equipment). Only high-pressure hoses designed for high-pressure applications should be utilized.
- Do not connect, disconnect, or tighten components (i.e. hoses, accessories, adapters, ect.) with the pump running.

## PERSONAL PROTECTIVE EQUIPMENT (PPE)

PPE requirements depend on water pressure and application. Perform a job-specific risk assessment to determine PPE needs. For more information, refer to industry best practices.

Typical PPE may include:

- Eye protection (glasses, goggles, visor)
- Foot protection (steel-toe, waterproof, non-slip boots)
- Hand protection (gloves)
- Ear protection (ear plugs or muffs for a minimum of 85 dBA)
- Head protection (hard hat with face and ear protection)
- Body protection (multi-layer waterproof clothing, high-vis clothing)
- Hose protection (hose shroud)
- Respiratory protection (depending on application)

Hydra-Flex designs nozzles with safety and potential hazards in mind, incorporating safety mechanisms where feasible to mitigate risks. However, the company is not responsible for any misuse of the equipment.



EMAIL US TODAY FOR  
NOZZLE TRAINING  
[hello@hydraflexinc.com](mailto:hello@hydraflexinc.com)





### DID YOU KNOW?

All Hydra-Flex nozzles come with a 90-day warranty.

## 90-DAY WARRANTY PROGRAM

### OVERVIEW

Hydra-Flex products are quality tested prior to shipping to ensure proper operation, rotation, and spray pattern. All products carry a 90-day warranty, covering manufacturing defects, that starts the day the product is shipped.

### POLICY

Hydra-Flex products are warrantied to be free from defects in materials and workmanship under normal use and service. "Normal use and service" means operated within recommended pressures, temperatures, and only handling compatible fluids. This warranty does not apply to any accessory repaired or altered to affect the performance or reliability of the product.

The warranty does not apply to:

- Freight damage
- Freezing damage
- Damage caused by parts or accessories not obtained from or approved by Hydra-Flex
- Damage from misuse and/or misapplication
- Damage due to poor water quality
- Normal wear of moving parts, components affected by moving parts, or surfaces meant to wear

The warranty period is 90 days from the date the product is shipped from Hydra-Flex. The manufacturer's warranty liability is limited to the repair or replacement of that product, to be determined by Hydra-Flex, if our investigation determines the product was defective when shipped. This warranty is in lieu of all other warranties, expressed or implied, including any warranty of merchantability and/or any other obligations or liabilities on the part of Hydra-Flex.

To inquire about the policy or to file a request for investigation, please email us at [hello@hydraflexinc.com](mailto:hello@hydraflexinc.com) or contact your direct sales representative to determine next steps. A return merchandise authorization number must be granted for units to be returned for replacement or repair.





CONNECT WITH US



[hydraflexinc.com](http://hydraflexinc.com)