
ROVVER X



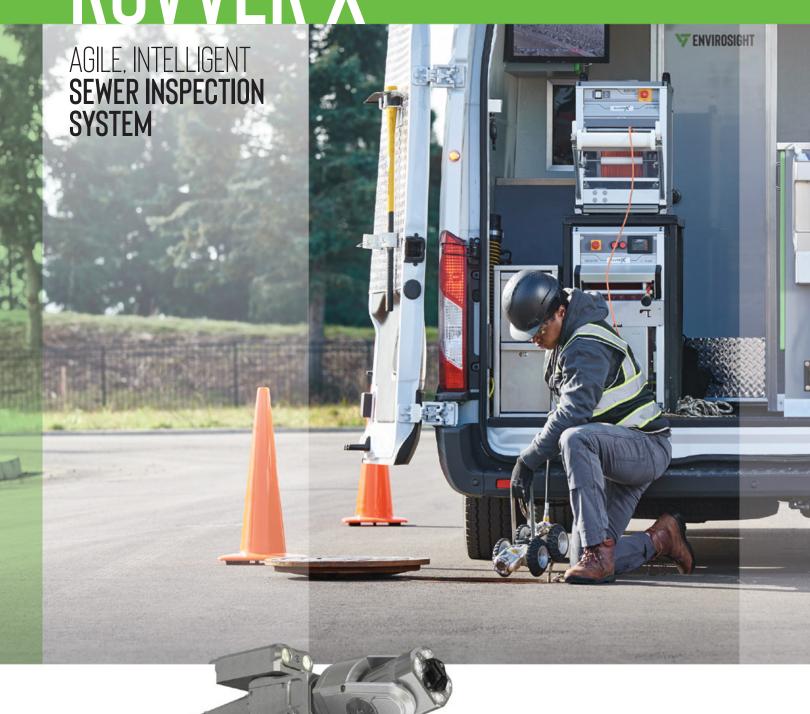

# **GAIN DEEPER INSIGHT**

When you open a manhole, be ready to get the full picture.

With unmatched power and agility, ROVVER X delivers the insight you need to make critical maintenance decisions. It offers industry-leading productivity with a simple interface, advanced capabilities and support for digital workflows.





# **SIMPLE**

Cut out complexity for your crew with technology that's easy to learn and use, a responsive support team, and a regional service network that delivers rapid turnaround.



# **RELIABLE**

Stay on schedule and within budget with ROVVER X's industry-low downtime and cost-of-ownership. Not only is it built to endure punishment, its intuitive design lets you perform routine maintenance right in the field.



# **ADAPTABLE**

Tackle any inspection challenge. ROVVER X accessories and wheels swap in seconds to fit any pipe size, material and condition. And when the job calls for specialized capabilities, easily add lateral launch, laser profiling, side scanning and more.



# **AGILE**

Power past obstacles that sideline other crawlers. With steerable six-wheel drive, ROVVER X avoids obstructions and climbs over debris and offsets. An array of onboard sensors helps you avoid hazards.




# **SMART**

Access every capability from a single interface—operate the crawler, record video, overlay text, log observations, measure defects and create reports. Inspection data streams securely to the cloud, and the system autoupdates to the latest features.

# **ADAPTABLE**

ROVVER X is the only crawler system that lets you change wheels and accessories rapidly without tools. Achieve new levels of productivity, and confidently handle any combination of pipe size, material and condition.

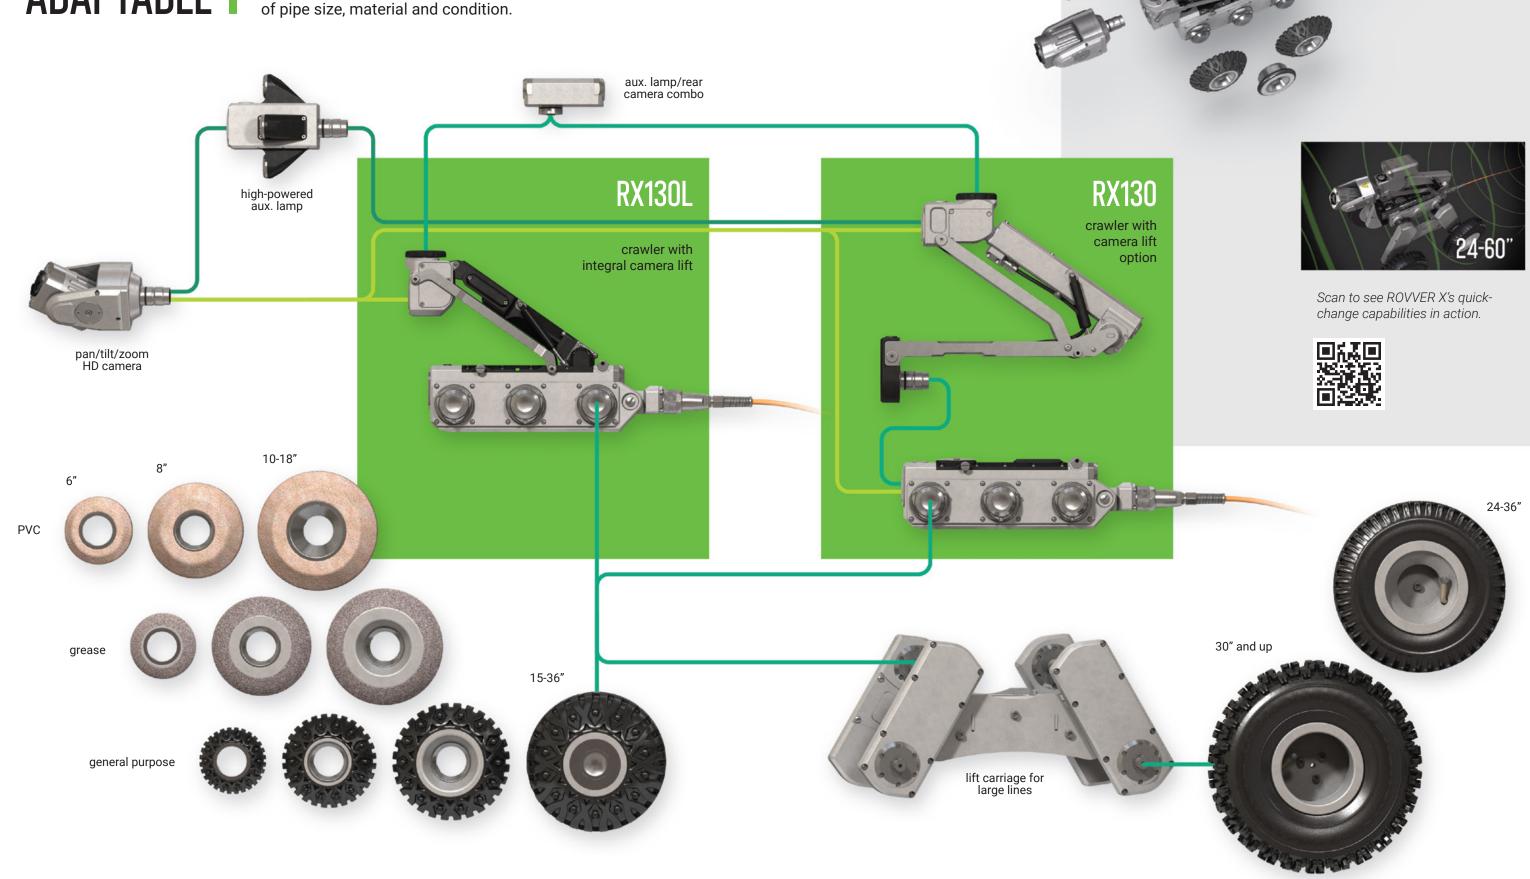

# **SMART**

Simple to learn yet powerfully capable, ROVVER X's touchscreen controls support your entire inspection workflow. And with built-in Wi-Fi, you can share inspections online and keep your ROVVER X system updated with the latest features.



### **NEED LESS?**

This remote control puts all major crawler and reel functions in the palm of your hand, and it comes standard with every ROVVER X system.



# NEED EVEN MORE?

camera

joystick

For maximum productivity, this optional desktop command center offers precision control, full QWERTY keyboard, and ergonomic comfort.



Flexspection only available on VC500 HD controller.

### **OPERATE**

crawler

joystick

Control every ROVVER X function using twin multi-function joysticks, intuitive touchscreen controls and real-time feedback. Onscreen notifications help warn against operating hazards.



With drag-and-drop simplicity, create an overlay that has static text, live data, observation details and your logo. Customize text position, color and background to your preference.

#### MEASURE DEFECTS

Powerful measurement tools let you size up cracks, water level, pipe diameter, wall features, bend angles, inclination and much more.

### **ENTER OBSERVATIONS**

Create an inspection, then log observations with help from onboard defect catalogs, including PACP and WRc.

#### **CREATE REPORTS**

Generate PDF reports from completed inspections, then deliver them via USB drive.



Space for	SHIRT THE PE	pecta lec es	e Robine	hes	lec .	Section	100	
ten	2.5		nee	conton	provine	190		k
Securitors	t starter		0	0	ø	n.	٥	F
Non-december 1	NAP.		(10)	0	P	n.	0	b
Minne	nurfan		0	0	P	Α.	0	
Spend			0	0	ø	(N/min	0	14
Date			0	0	ø	NOTES	0	
100			®.	0	ø	ANDRE	٥	
Man See Co.	eta		0	0	ø	hhm.	0	ď.
Conscre Titl			0	0	ø		0	
Conces Sergerature	where		0	0	ø	9	0	N.



Prices Dr. Aberta D Inspection inserves	To the state of th	
0.41600 6.5m	0.00 ft  6.00 ft  6.00 ft  6.00 ft  6.00 ft  6.00 ft	•
SURMINE 6 3H	4.00 to	
2	4.60 ft. Misoriamens Delar Line), 40 ft of cross sectional area	_
]+	6.00 th Citates Elevise	Ł
O		?





### CONNECTED

Wirelessly upload your inspections directly to WinCan Web, the cloud platform for sewer inspection data. Review, edit, analyze and map inspection data online, and securely share results with your entire team.



Scan to set up your free WinCan Web trial account:



# CAPABLE


measurement When you choose lasers auto-switching, aux. lamp near/far lamps ROVVER X, you're port prioritizing productivity. Advanced features ensure your team collects crystal tri-band sonde clear footage and actionable data from any line with minimal disruptions. HD camera with 120X zoom (10X optical) camera lift with 7" vertical infinite pan, ±135-degree tilt travel incline, temp, steerable 6-wheel drive rear-view pressure camera & lamp swivel cable quick-change The rugged **ROVVER X cable** boasts a 1000-lb break strength. And with just 6 conductors, it's Available in 984' and 1640' easy to field-reterminate. versions, the **ROVVER X reel** automatically feeds cable so the

> crawler doesn't have to pull it off the reel. This extends travel range and reduces crawler

> > wear-and-tear.

# SCALABLE

Once you own the ROVVER X platform, the sky is the limit. Specialty crawlers and attachments give you plug-and-play capability, so you can meet any inspection challenge.

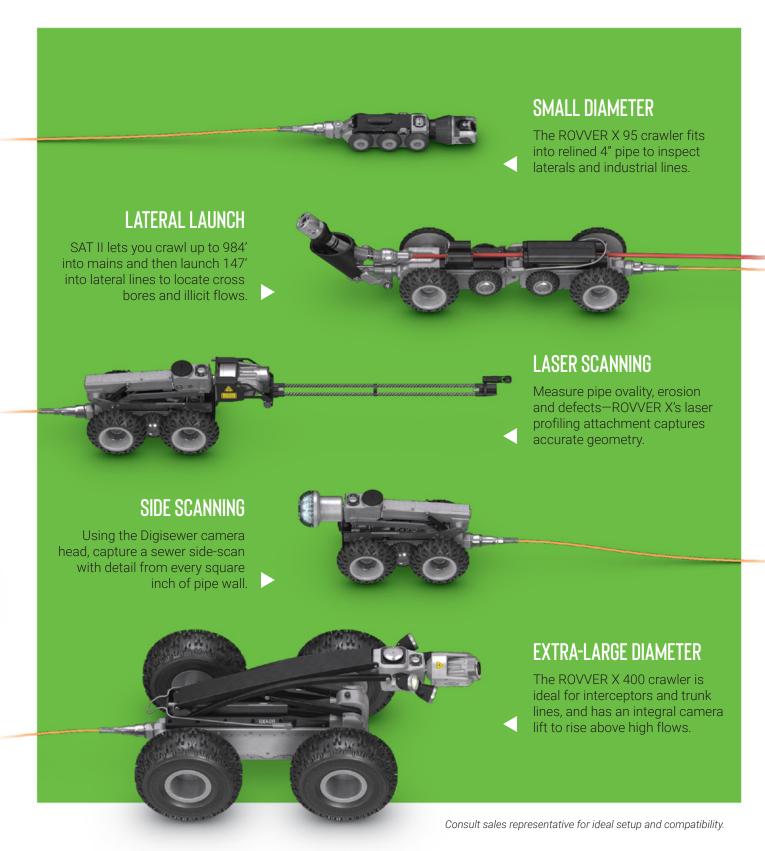

# MOBILE

Stay safe, productive and comfortable while deploying your ROVVER X in the field. Envirosight-built vehicles protect your crew and offer full amenities—ensuring your equipment, tools, and safety gear are within easy reach.

# PANEL VANS Fit into alleys and other tight spaces while deploying ROVVER Power options include X or lateral launch. Choose generator (gas or diesel), inverter among Sprinter, Transit and with battery, or engine PTO.

### **BOX TRUCKS**

Get maximum elbow room, plus extra capacity for lateral launch systems, generator power sources and cranes.

ProMaster options, with power

from an inverter or vehicle PTO.



### **TRAILERS**

Gain flexibility when inspection is part time or when inspection equipment must be shared between crews.



### **ENCLOSURES**

Deploy an Envirosight Outpost when you need access to easements and other remote worksites using a pickup or ATV.



# TRUSTED

LOCAL PRESENCE

you on demand.

WARRANTY

you need help.

the industry's most

Success in our industry is a

ground game. That's why we

and capabilities strategically deployed nationwide, ready for

have systems, parts inventory

ROVVER X is backed by one of

Optional maintenance plans and

extended warranties offer further

comprehensive warranties.

cost predictability. And with

more than 25 factory-certified

service centers across North

America, we're never far when

Standing behind ROVVER X is a team with decades of experience helping sewer professionals succeed. We've built the industry's largest network of regional support and service locations—so wherever the job takes you, help is never far.



### **TRAINING**

Your operators will be productive out of the gate with on-site training from certified ROVVER X instructors. Not only do we cover equipment care, operation and safety, we're available to provide PACP training, too. Need virtual training? We deliver it on demand from a fully equipped studio.

TURNAROUND

Gain access to our comprehensive online parts portal, where in-stock orders placed before 3:00 pm ship the same day, with next-day delivery available. And when unique challenges require unique capabilities, know that rental gear is available from 23 locations across the continent.



Don't take our word for it. Some of the largest cities and contractors trust ROVVER X. Scan to read their stories.





locations in North America



compared to purchase price



# **SPECIFICATIONS**

#### system

rating	S.						CE, NRTL
powe	r.						. 120-240 Vac, 60 Hz
							pipelines 4-96" dia.
opera	tin	g t	em	р.	 		 32 to 104°F
							4 to 158°F

#### camera (RCX90 HD)

sensitivity 0.05 lux resolution
zoom lens 120x (10x optical, 12x digital)
pressure rating
protection class IP68
features auto shutter; auto/manual focus
illumination dimmable LED, dual mode
articulation ±135 deg tilt; infinite pan
measurement twin laser diodes spaced 1.97"
sensing temperature, pressure, pan/tilt
size 6.6"×3.2"×2.8" (168×81×72 mm)
weight 3.3 lb (1.5 kg)
materials aluminum, stainless steel

#### crawler (RX130 HD, RX130L HD)

drivetrain steerable 6-wheel drive
turn radius down to 0.0"
camera color rear-view with tri-LED lamp
sensors pitch, roll, temperature, pressure
pressure rating 1 bar
protection class
size (130) 12.2"×4.3"×3.5" (310×110×90 mm)
size (130L) 15.1"×5.0"×4.6" (384×126×117 mm)
weight (130) 13.2 lb (6 kg)
weight (130L) 17.6 lb (8 kg)
lift range (130L) 7.1" (180 mm)
materials aluminum, stainless steel
sonde transmitter 33kHz/512Hz/640Hz

#### control pendant (VC500 HD)

#### auxiliary lamp (RAL200 HD, optional)

forward illumination	twin tri-LED lamps
camera color	rear-view with tri-LED lamp
sonde transmitter	33 kHz / 512 Hz
protection class	IP68
dims 2.8"x"	1.3"×4.0" (72×33×102 mm)
	1.3 lb (0.6 kg)
materials	aluminum, stainless steel



#### cable reel (RAX300 HD)


cable cable cable cable control control sensor size . protect weight	length 984' (300 m) diameter 4" (6.5 mm) weight 0.03 lb/ft strength 1000 lb conductors 6 bls (local) power, emergency stop bls (via pendant) auto/manual, speed, forward/reverse, pull strength rs tension, tilt 24.6"×14.5"×22.6" (625×368×575 mm) tion class P44 t 123.4 lb (56 kg)
weigh conne	t

#### camera lift (optional)

lift range		7.1" (180 mm)
materials	aluminum	stainless steel

#### carriage (optional)

wheelbase (w/l)	14.5"/12.2" (368/310 mm)
weight	34.2 lb (15.5 kg)
materials	aluminum, stainless steel



- RX130 HD crawler body
- RCX90 HD camera head
- RAX300 HD reel with 984' cable



Request a FREE On-site Demo



