SEWER JETTING



BLOCKAGES FEAR IT

Eliminate roots, FOG, and the toughest blockages in fewer passes with the Reaper's cutting power. Designed to hit specific angles that cut faster to save you time and money.



AVILABLE IN SIZES FOR EVERY PIPE



1/4"

RELITE


www.hydraflexinc.com | hello@hydraflexinc.com







STAINLESS STEEL HOUSING AND TUNGSTEN CARBIDE WEAR SURFACES FOR EXTENDED LIFE

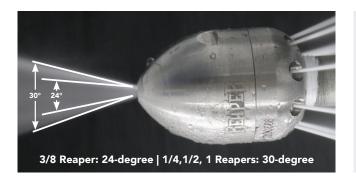



Feed the nozzle all the way to the blockage. Once there, pull back the hose (6"-12" depending on pipe size) and attack the blockage. This ensures the front stream hits the full pipe diameter for max clearing power.



NOZZLE SIZE	FNPT NOZZLE PART NUMBER	BSPP NOZZLE PART NUMBER	FLOW RATE CHART						
			@1,500 PSI (103 Bar)	@2,000 PSI (138 Bar)	@2,500 PSI (172 Bar)	@3,000 PSI (207 Bar)	@3,500 PSI (241 Bar)	@4,000 PSI (276 Bar)	@5,000 PSI (344 Bar)
			1/4" NOZZLE	- IDEAL FOR 2"	- 4" OR 50MM -	100MM PIPES			
6.0	1003521-060	1003522-060	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.6 GPM (21.2 LPM)	6.0 GPM (22.7 LPM)	6.7 GPM (25.4 LPM)
8.0	1003521-080	1003522-080	4.9 GPM (18.5 LPM)	5.7 GPM (21.6 LPM)	6.3 GPM (23.8 LPM)	6.9 GPM (26.1 LPM)	7.5 GPM (28.4 LPM)	8.0 GPM (30.2 LPM)	9.0 GPM (34.1 LPM)
			3/8" NOZZLE	- IDEAL FOR 3"	- 6" OR 90mm -	180mm PIPES			
6.0	1003031-060	1003204-060	3.7 GPM (14.0 LPM)	4.2 GPM (15.9 LPM)	4.7 GPM (17.8 LPM)	5.2 GPM (19.7 LPM)	5.6 GPM (21.2 LPM)	6.0 GPM (22.7 LPM)	-
9.0	1003031-090	1003204-090	5.5 GPM (20.8 LPM)	6.4 GPM (24.2 LPM)	7.1 GPM (26.9 LPM)	7.8 GPM (29.5 LPM)	8.4 GPM (31.8 LPM)	9.0 GPM (34.1 LPM)	-
12.0	1003031-120	1003204-120	7.3 GPM (27.6 LPM)	8.5 GPM (32.2 LPM)	9.5 GPM (36.0 LPM)	10.4 GPM (39.4 LPM)	11.2 GPM (42.4 LPM)	12.0 GPM (45.4 LPM)	-
			1/2" NOZZLE	- IDEAL FOR 4"	- 8" OR 110mm -	- 225mm PIPES			
12.0	1003032-120	1003205-120	7.3 GPM (27.6 LPM)	8.5 GPM (32.2 LPM)	9.5 GPM (36.0 LPM)	10.4 GPM (39.4 LPM)	11.2 GPM (42.4 LPM)	12.0 GPM (45.4 LPM)	-
15.0	1003032-150	1003205-150	9.2 GPM (34.8 LPM)	10.6 GPM (40.1 LPM)	11.9 GPM (45.0 LPM)	13.0 GPM (49.2 LPM)	14.0 GPM (53.0 LPM)	15.0 GPM (56.8 LPM)	-
18.0	1003032-180	1003205-180	11.0 GPM (41.6 LPM)	12.7 GPM (48.1 LPM)	14.2 GPM (53.8 LPM)	15.6 GPM (59.1 LPM)	16.8 GPM (63.6 LPM)	18.0 GPM (68.1 LPM)	-
24.0	1003032-240	1003205-240	14.7 GPM (55.6 LPM)	17.0 GPM (64.4 LPM)	19.0 GPM (71.9 LPM)	20.8 GPM (78.7 LPM)	22.4 GPM (84.8 LPM)	24.0 GPM (90.8 LPM)	-
			1" NOZZLE -	IDEAL FOR 6" - '	18" OR 180mm -	460mm PIPES			
40.0	1003718-400	1003720-400	26.9 GPM (102.0 LPM)	31.1 GPM (117.8 LPM)	34.8 GPM (131.7 LPM)	38.1 GPM (144.2 LPM)	-	-	-
60.0	1003718-600	1003720-600	39.2 GPM (148.4 LPM)	45.3 GPM (171.3 LPM)	50.6 GPM (191.5 LPM)	55.4 GPM (209.8LPM)	-	-	-
80.0	1003718-800	1003720-800	49.0 GPM (185.4 LPM)	56.6 GPM (214.1 LPM)	63.2 GPM (239.4 LPM)	69.3 GPM (262.3 LPM)	-	-	-